

ROTATING TELEHANDLERS | 555-210R / 555-260R



# THE KING NOW HAS SWING



**STAGE V**

MAX ENGINE POWER  
**112kW**

MAX LIFT HEIGHT  
**20.5m – 25.5m**

MAX LIFT CAPACITY  
**5,500kg**

# ALL-ROUND SIMPLICITY.

Our new rotating telehandlers have the same simple, well designed controls as our standard telehandlers, delivering a similar operator experience across machines.



## SIMPLE DESIGN

Our control interface has been designed for quick, simple and intuitive use. The dedicated Load Management & Machine LCD screens provide simple, clear information.



# ALL-ROUND VERSATILITY.

Our machines combine the reach and lifting capability of a crane, the manoeuvrability of a telehandler and the access of a mobile work platform, for 3-in-1 versatility.





## ATTACHMENT EASE

Our Clearview Quickhitch with Automatic RFID attachment recognition, provides the correct load chart & enables attachments to be swapped in seconds.


# ALL-ROUND SAFETY.

Our new rotating telehandlers are designed for complete safety, with best-in-class visibility and load management system to keep you safe and secure at all times.

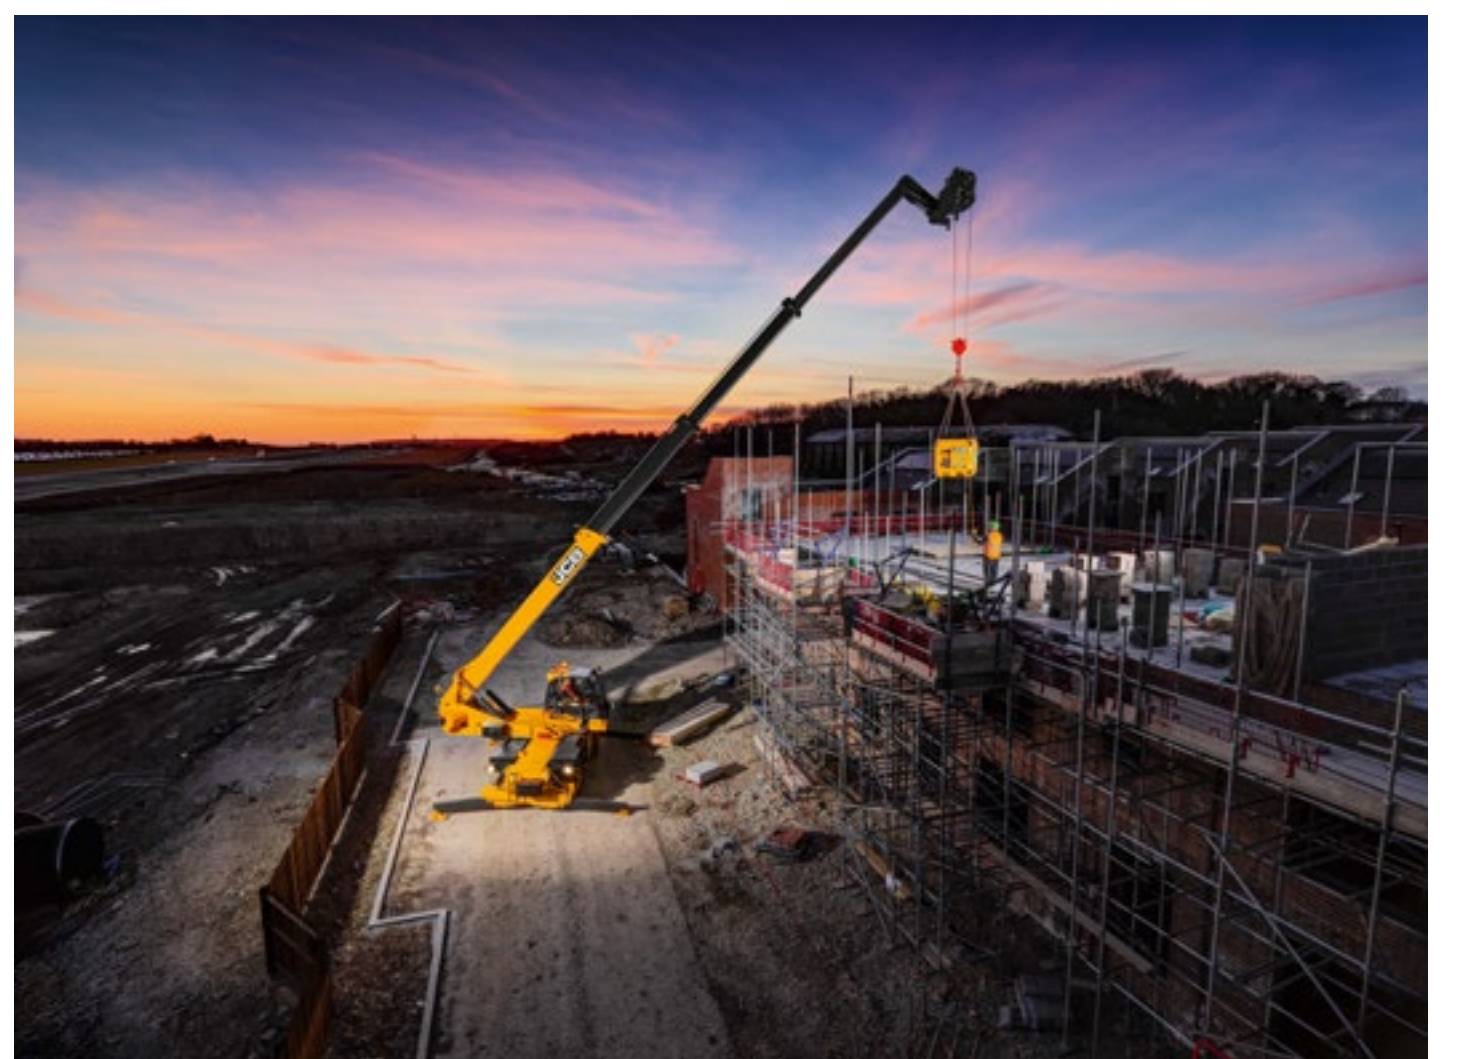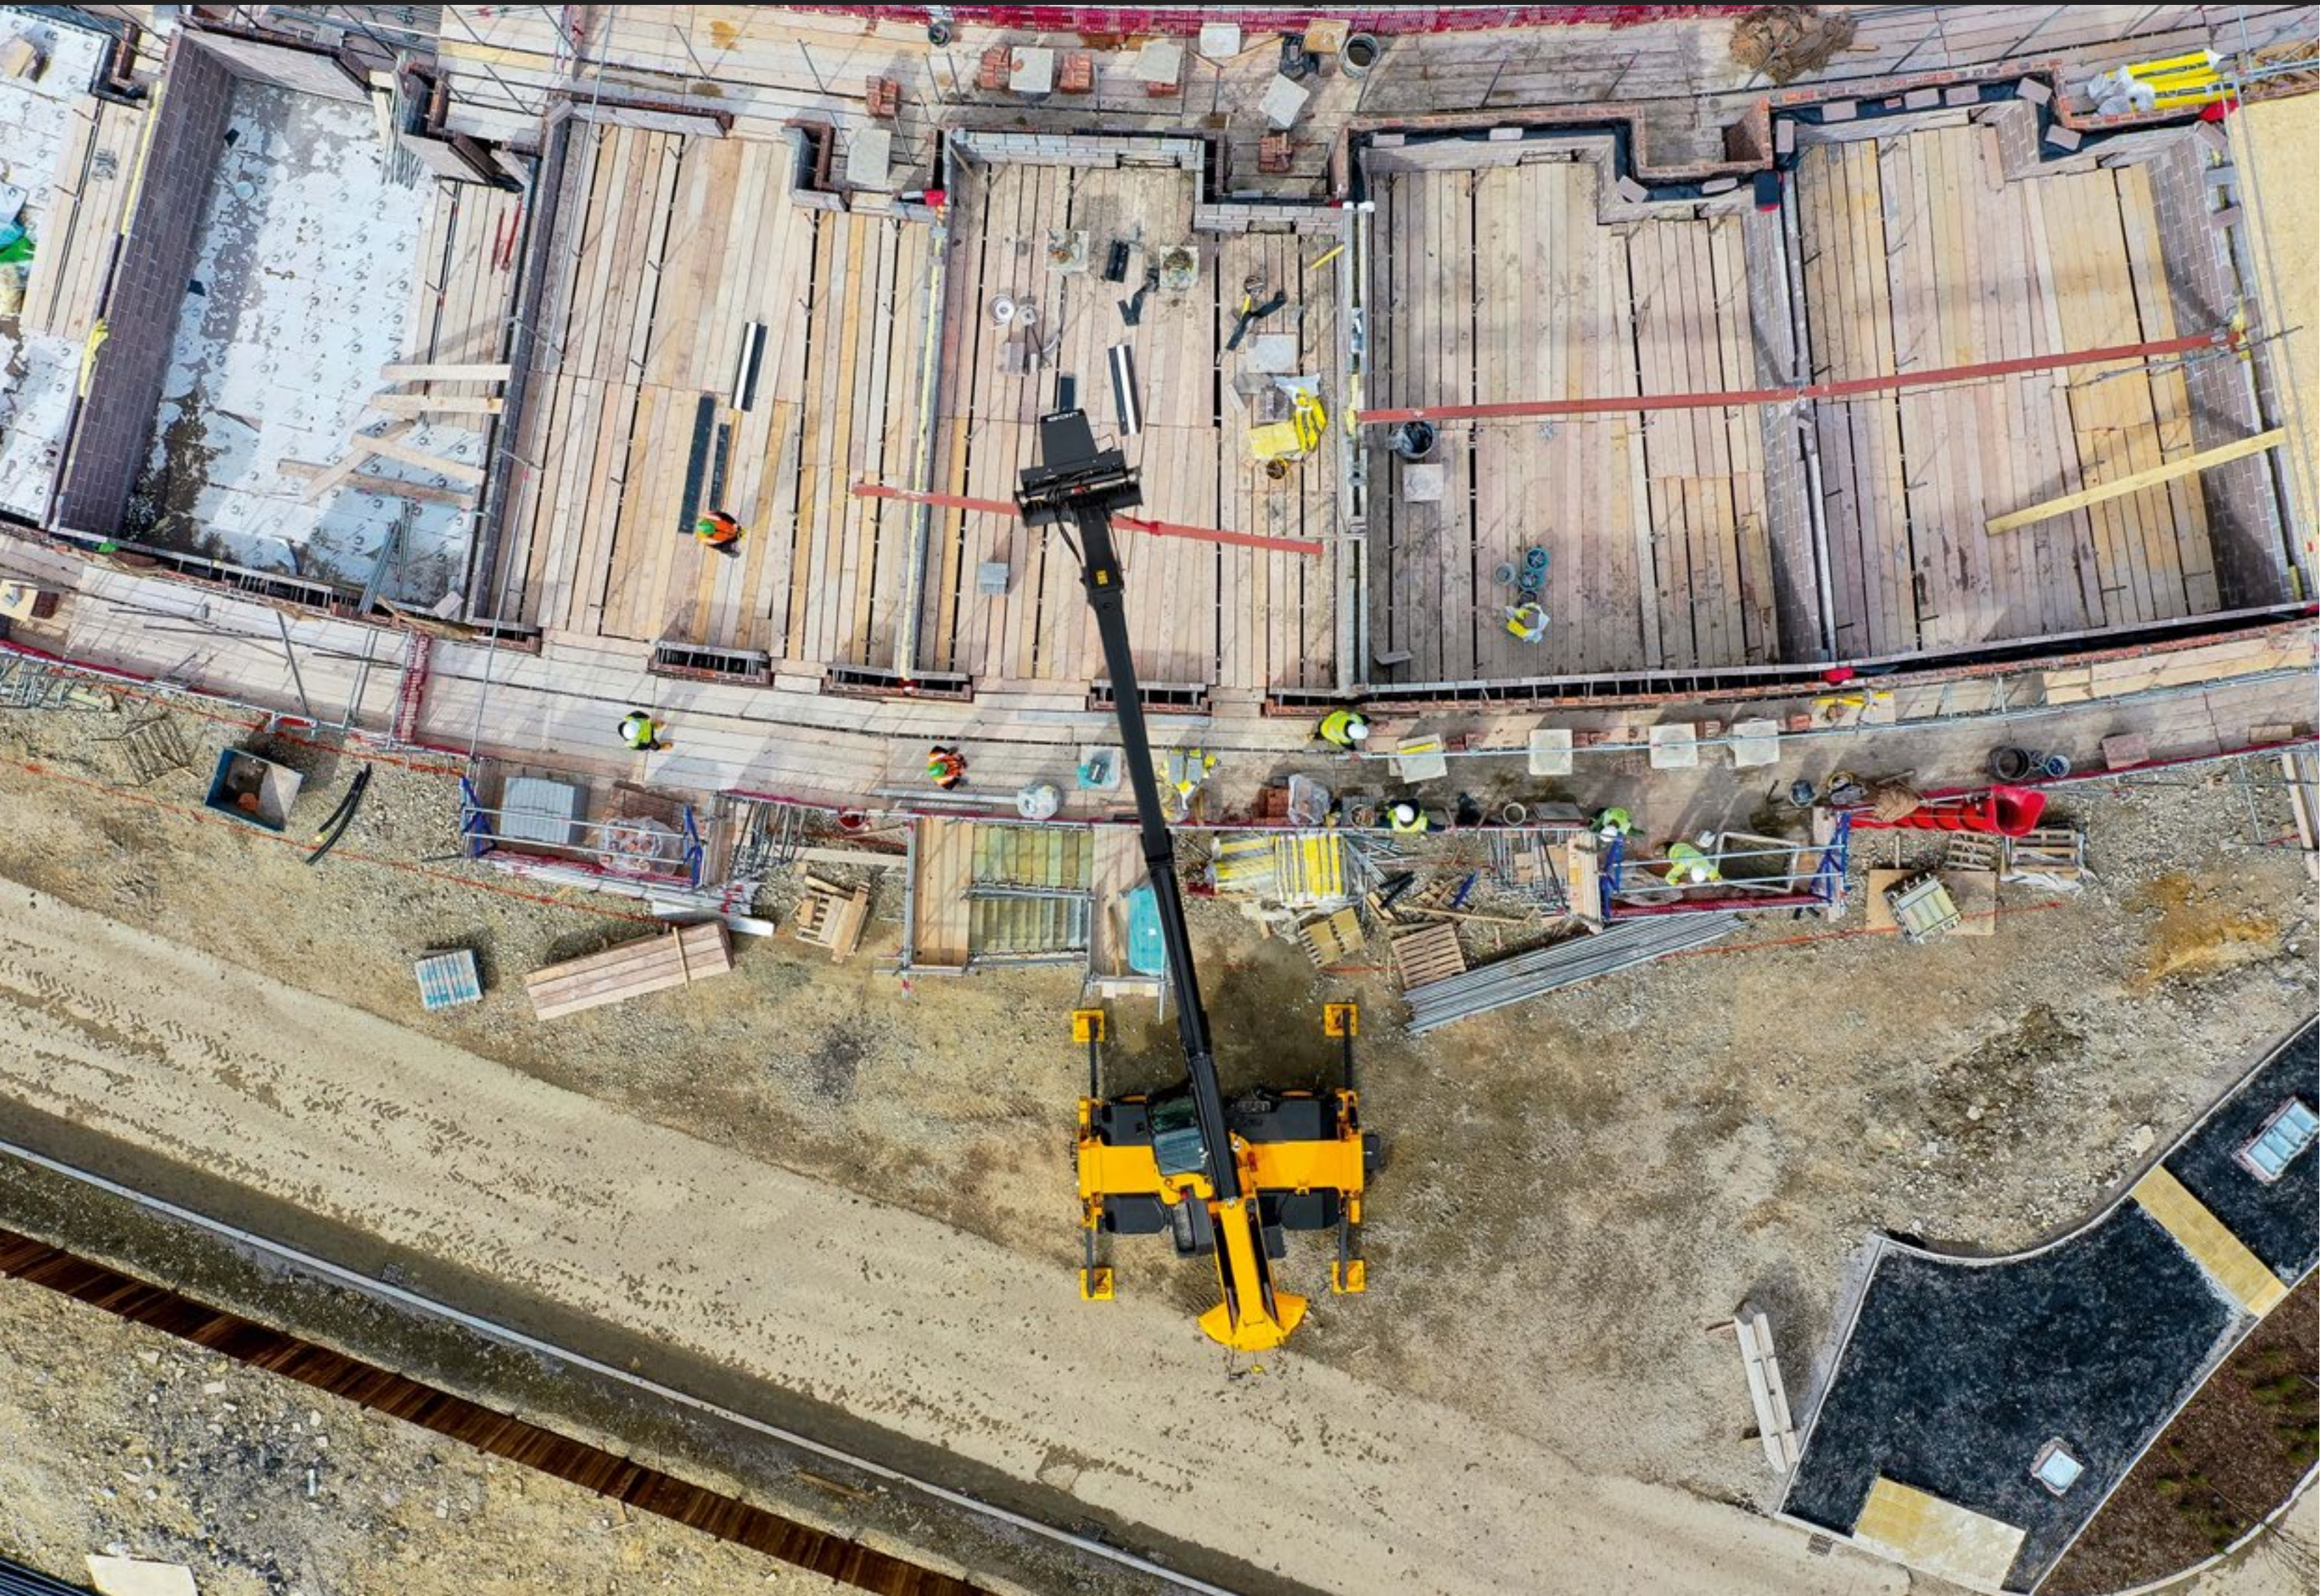

## SAFER WORKING

Extra-large stabiliser feet ensure maximum stability. Unique twin lift rams offer class-leading right hand side visibility and unrivalled hydraulic lift performance.

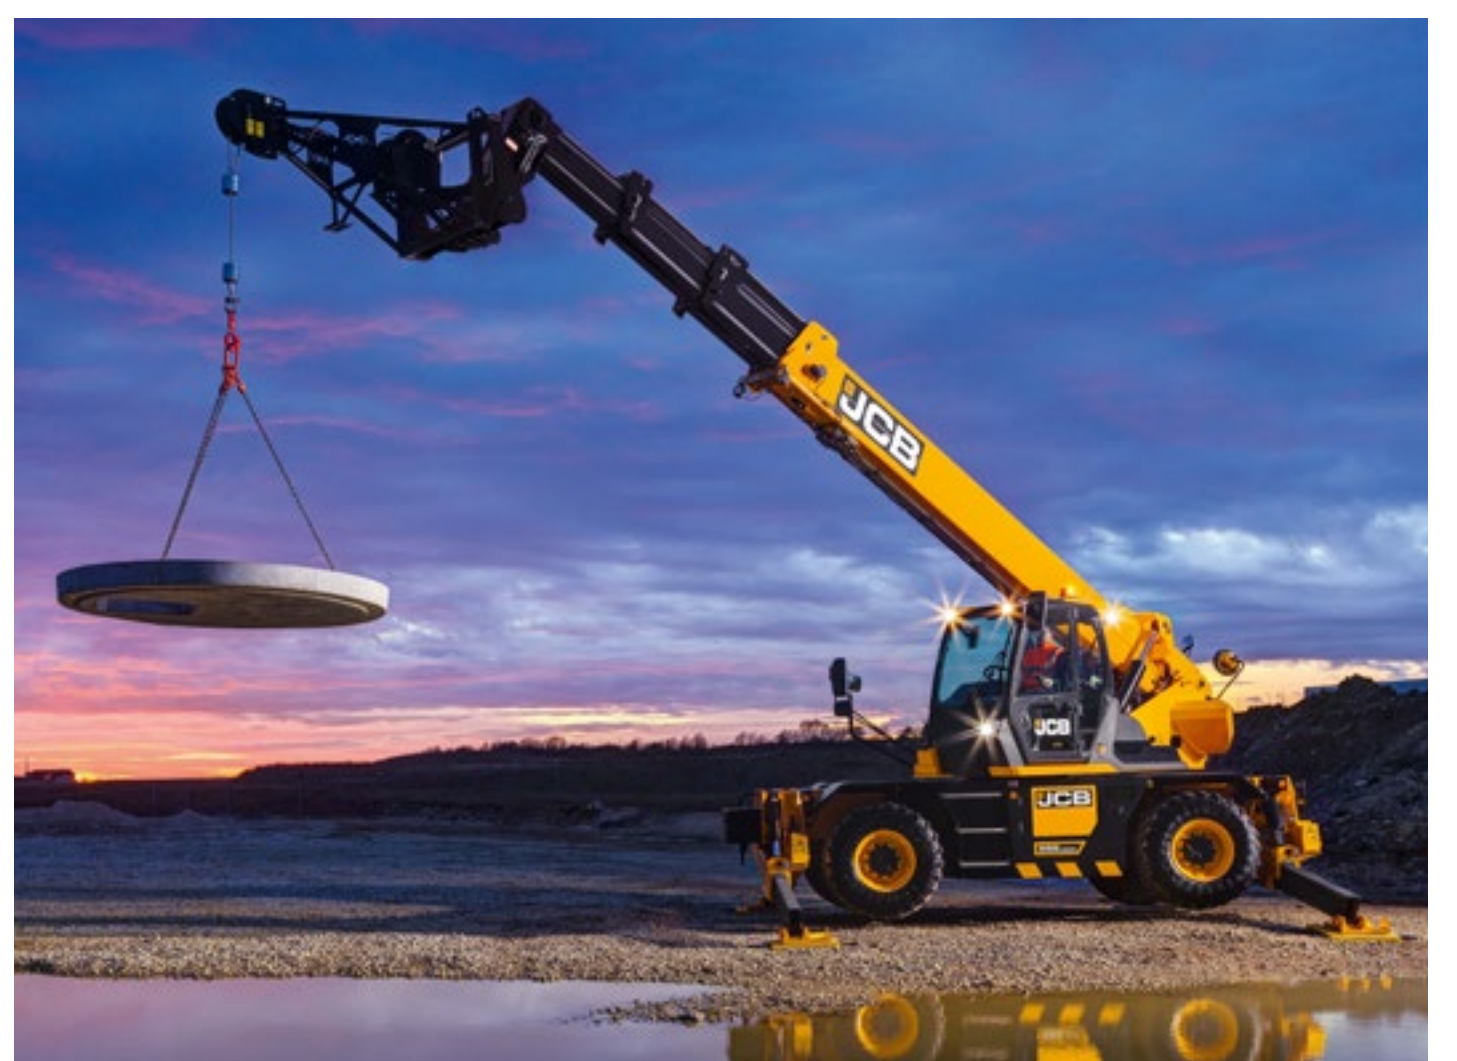

# ALL-ROUND PRODUCTIVITY.

Whatever the application, our rotating telehandlers have been extensively tested and proven in real world conditions to give you maximum performance.




## FASTER WORKING

Our Automate technology makes for fast deployment of outriggers, taking an industry-leading 26 seconds from travel position to fully rigged and ready to lift.

# ALL-ROUND EFFICIENCY.

Using 85% of shared JCB components, plus proven manufacturing and assembly techniques, we provide the very highest levels of quality, reliability and efficiency.

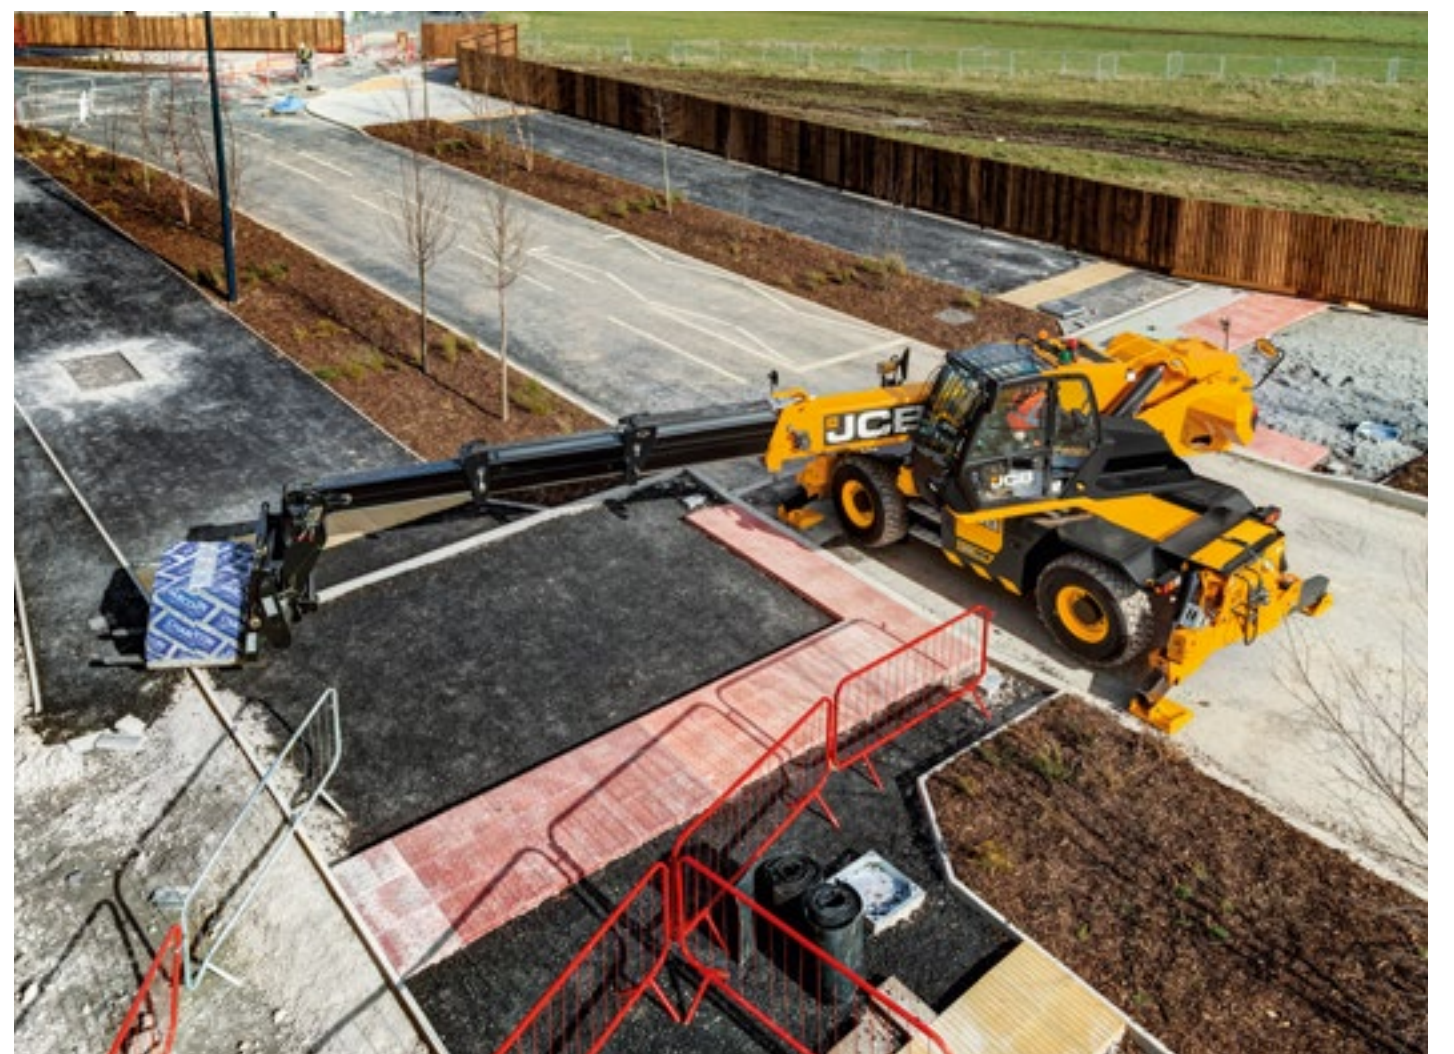

## FUEL SAVING

Our class-leading hydraulics save fuel by harnessing gravitational forces, while our Auto idle and stop features ensure the engine is only working when needed.



# ROTATING TELEHANDLERS | 555-210R / 555-260R



## SPECIFICATION.

MODEL	555-210R	555-260R
Max lift height	20.5m	25.5m
Max reach	17.8m	21.4m
Max lift capacity	5,550kg	
Road speed	40kph	
Hydraulic flow	160 l/min	
LiveLink telematics	5 years	



## STANDARD FEATURES.

- RFID attachment recognition
- Automate technology
- Man platform ready
- Remote control ready
- 7" dedicated LMS display
- 5 configurable profiles
- Auto engine idle and stop
- 40kph hydrostatic transmission
- Air suspension seat
- LiveLink telematics

The JCB logo, consisting of the letters 'JCB' in a bold, white, sans-serif font inside a black rectangular box, which is itself set within a larger yellow rectangular background.

**MICHAEL**  
**SWORD CONSTRUCTION**

**“The visibility is a lot better than any other machine.  
It's very versatile and easy to use.”**

**MICHAEL | ROTATING TELEHANDLER OPERATOR**

**THE KING NOW HAS SWING**

**REQUEST A QUOTE**

The JCB logo, identical to the one in the top left corner, featuring the letters 'JCB' in white on a black background within a yellow border.

[www.jcb.com](http://www.jcb.com)

