

ROTATING TELEHANDLERS | 558-210R PRO, 558-260R PRO



THE ALL-NEW ALL-ROUNDER




MAX ENGINE POWER
112kW

MAX LIFT HEIGHT
20.5m – 25.5m

MAX LIFT CAPACITY
5,800kg

ALL-ROUND SIMPLICITY

Our new rotating telehandlers have the same simple, well designed controls as our standard telehandlers, delivering a similar operator experience across machines.

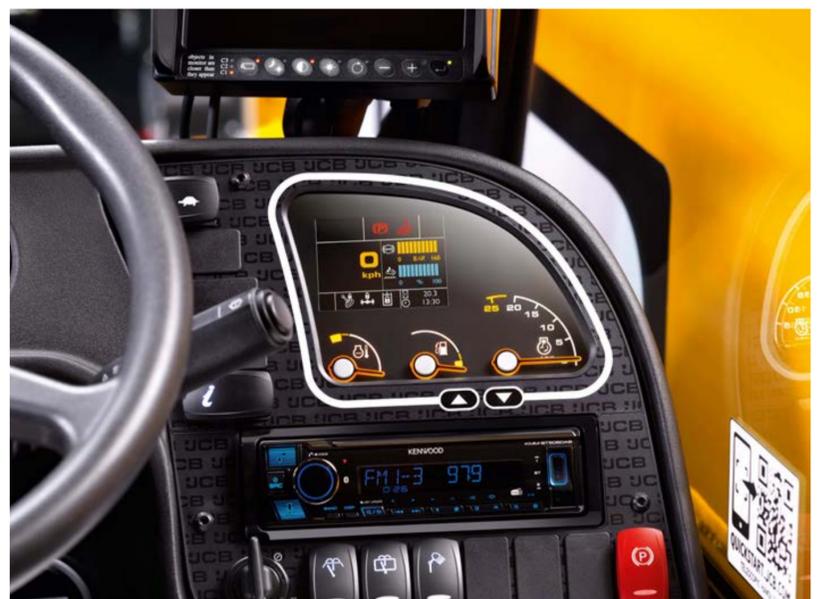

SIMPLE DESIGN

Our control interface has been designed for quick, simple and intuitive use. The dedicated Load Management & Machine LCD screens provide simple, clear information.



ALL-ROUND VERSATILITY

Our machines combine the reach and lifting capability of a crane, the manoeuvrability of a telehandler and the access of a mobile work platform, for 3-in-1 versatility.






ATTACHMENT EASE

Our Clearview Quickhitch with Automatic RFID attachment recognition, provides the correct load chart & enables attachments to be swapped in seconds.


ALL-ROUND SAFETY

Our new rotating telehandlers are designed for complete safety, with best-in-class visibility and load management system to keep you safe and secure at all times.

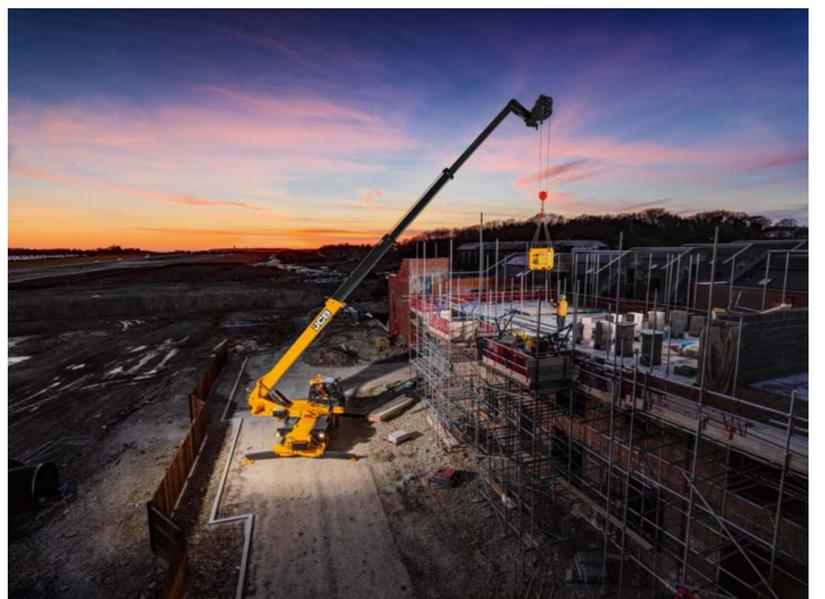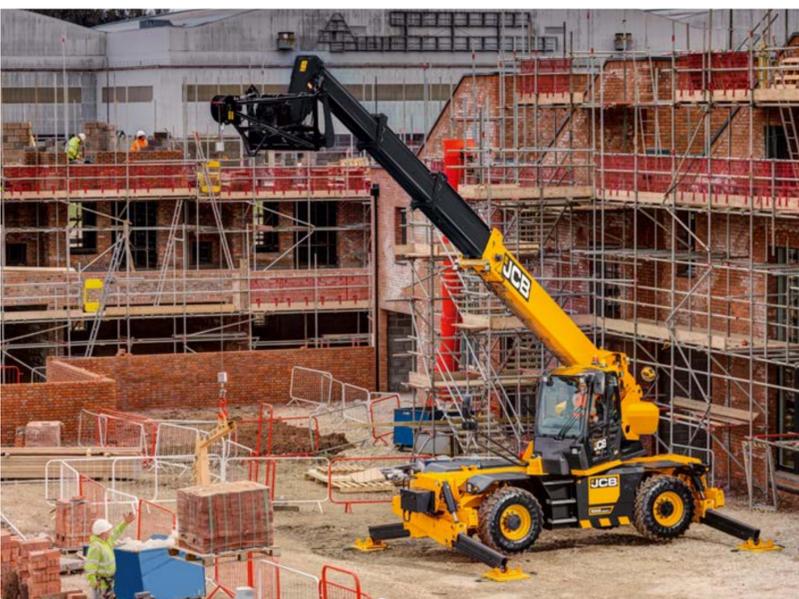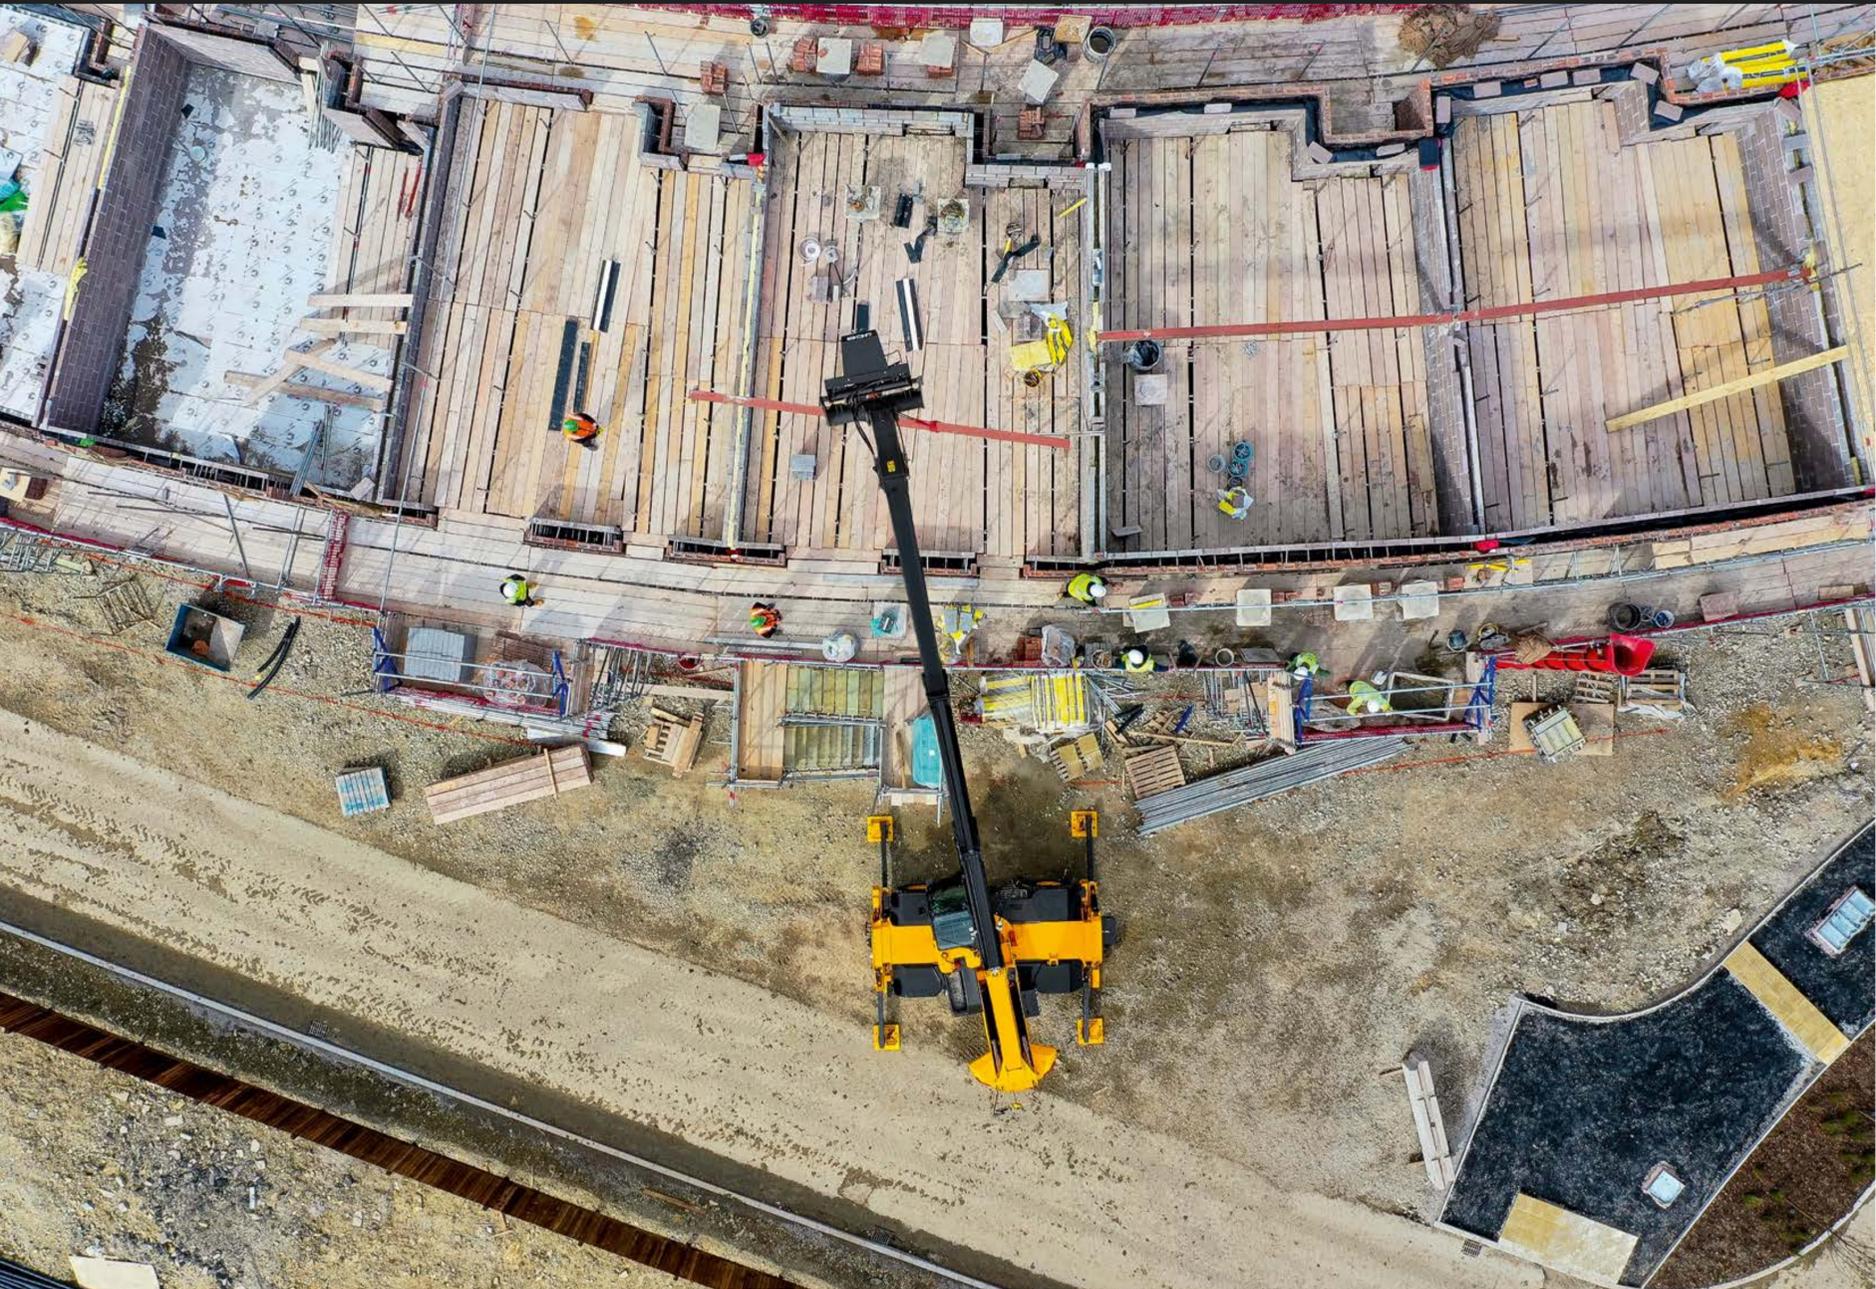

SAFER WORKING

Extra-large stabiliser feet ensure maximum stability. Unique twin lift rams offer class-leading right hand side visibility and unrivalled hydraulic lift performance.

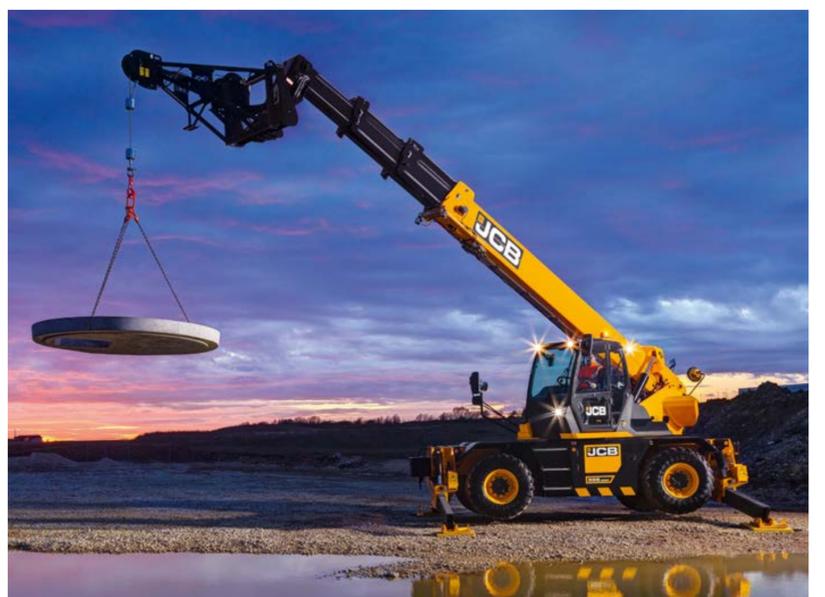

ALL-ROUND PRODUCTIVITY

Whatever the application, our rotating telehandlers have been extensively tested and proven in real world conditions to give you maximum performance.




FASTER WORKING

Our Automate technology makes for fast deployment of outriggers, taking an industry-leading 26 seconds from travel position to fully rigged and ready to lift.

ALL-ROUND EFFICIENCY

Using 85% of shared JCB components, plus proven manufacturing and assembly techniques, we provide the very highest levels of quality, reliability and efficiency.

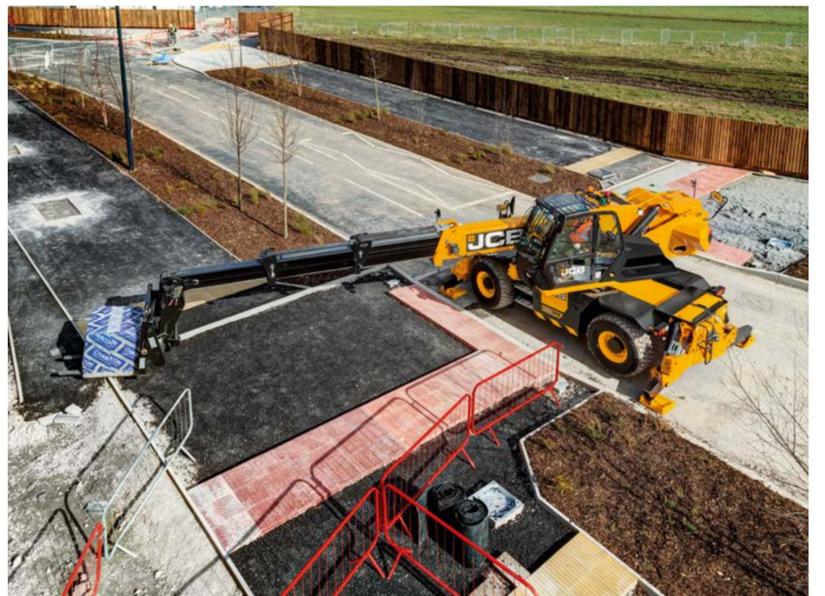

FUEL SAVING

Our class-leading hydraulics save fuel by harnessing gravitational forces, while our Auto idle and stop features ensure the engine is only working when needed.



ROTATING TELEHANDLERS | 558-210R PRO, 558-260R PRO



SPECIFICATION

MODEL		558-210R PRO	558-260R PRO
Max lift height	m	20.5	25.5
Max reach	m	17.8	21.4
Max lift capacity	kg	5,800	
Road speed	kph	40	
Hydraulic flow	l/min	160	
LiveLink telematics		5 years	



STANDARD FEATURES

- LiveLink telematics
- Safety pack
- Vision pack
- Storage pack
- Comfort pack
- Handling pack
- Security pack
- Maintenance pack
- 3 year warranty
- Radio control



JCB



MICHAEL
SWORD CONSTRUCTION

**“The visibility is a lot better than any other machine.
It's very versatile and easy to use.”**

MICHAEL | ROTATING TELEHANDLER OPERATOR

THE ALL-NEW ALL ROUNDER

REQUEST A QUOTE



JCB

www.jcb.com

